





DUST COLLECTION SOLUTIONS

MAC PULSE VALVE

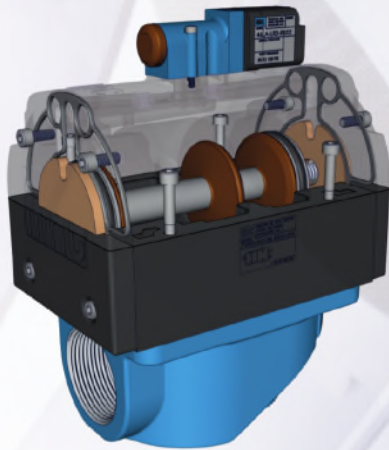


MAC Design

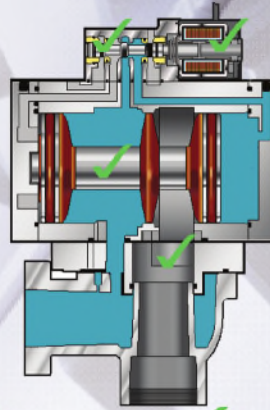

- ✓ **D-Seal Technology**
Isolates Solenoid
- Longer Life -
- ✓ **Dynamic Bonded Rubber Spool**
- Balanced -
- Wiping Action -
- ✓ **Lifting Solenoid**
- Consistent Response -
- ✓ **Adapter Plate**
- Drop-in Replacement to Existing Manifold-

vs. Competition Design

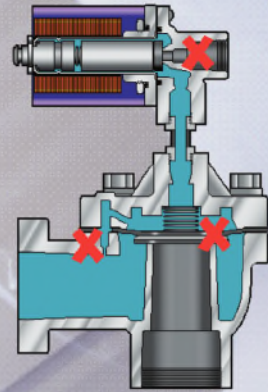

- ✗ Contaminated Air Passes Through Unbalanced Solenoid
- Sticking & Burnout -
- ✗ Small Fixed Orifice
- Blocked By Contaminants -
- ✗ Diaphragm Ruptures
- Air Leaks -

MAC Spool Design



- + 10 Million Cycles = Longer Life
- Wiping Action = Self Cleaning
- Balanced Design = Repeatable Purges
- No Ruptured Diaphragms = Less Wasted Air
- Viton Rubber = Harsh Environments

Diaphragm Design



- ✗ 1 Million Cycles = Short Life
- ✗ Cracking and Leaking = Wasted Air
- ✗ Constant Maintenance Required = High Cost of Ownership

MAC Technology Improved Filter Cleaning per Pulse

- ✓ Pulse time frequency optimization - Enhanced bag life
- ✓ Drop-in mounting: Adapter plates available without disturbing existing piping
- ✓ Balanced spool & pilot design: Unaffected by pressure variations
- ✓ Very fast & repeatable response times
- ✓ Long life: Spool technology
- ✓ Energy savings - Less consumption of air



MAC Valves - Highly engineered solutions for the highest performing applications since 1948



MAC Valves, Inc. Wixom, Michigan - MAC Valves, Inc. Dundee, Michigan - MAC Valves Europe, Inc. Liège, Belgium - MAC Valves Asia, Inc. Taiwan

To find your *local* distributor, visit www.macvalves.com



MW001-DC-MAR2016 - As we constantly strive to improve production, MAC Valves, Inc. reserves the right to modify its products. Therefore, this document cannot be considered as contractually binding. All intellectual property rights, including copyright, are reserved by MAC Valves, Inc. and its associated companies. March 2016 - MAC Valves Europe, Inc. All rights reserved / Credits: Shutterstock Irmantovic, (Stock - Aspallic)